
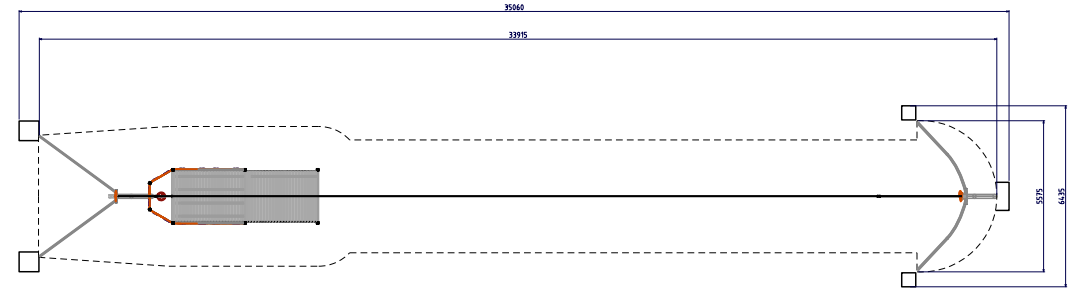


# Gliding Fox - With Ramp

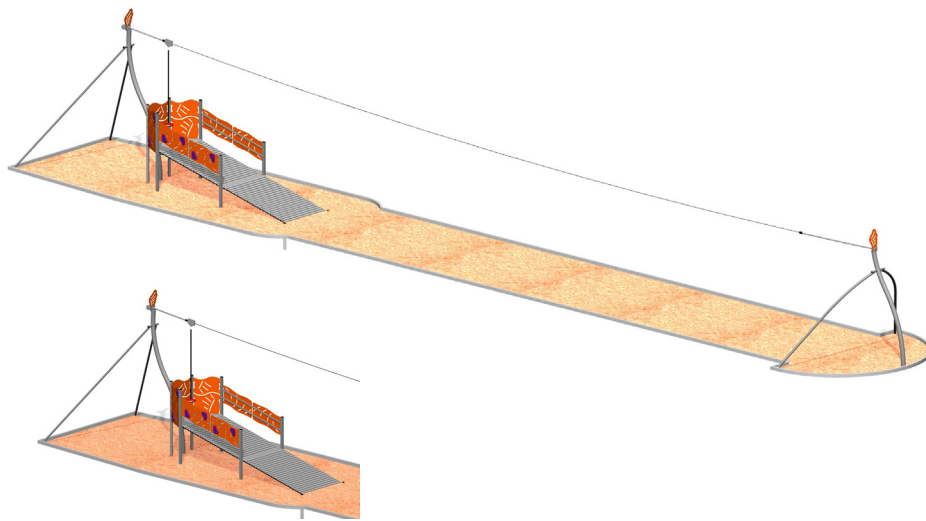

Always a favourite for all ages, the robust Gliding Fox, with its contemporary design is a very popular option for larger regional parks. Engineered to withstand the rigours of constant public use, the Gliding Fox is built to stand the test of time.

This version has a ramp to allow inclusive access for all ages. Please note that the flyway is designed for a level site, although moderate variations can be absorbed by installing the main posts higher or lower as required. A choice of an all abilities seat or pommel seat is available.

## SPECIFICATIONS

Product Code: FS125/148
Age Range: 4-15 Years
Max Fall Height: 1500mm
Minimum Fall Zone: 145.6m <sup>2</sup>
Minimum Install Zone: 147.0m <sup>2</sup>
Equipment Size: 33930mm x 5250mm
Max Equipment Height: 4475mm
Max Load: Seat - 100kgs Pommel - 120kgs
Play spaces: Parks, schools, commercial

## MATERIALS

<b>COLOURS</b>	Frame: Standard powder coat range Panels: Standard power coat range Panel Insets: Standard HDPE range Pommel: Standard plastic range
<b>MATERIAL SPECS</b>	Frame: Galvanised steel Support legs: Stainless steel Ramp uprights/platform/boards: Aluminium Ramp support frame: Galvanised steel Panels: Aluminium Fasteners: Steel & stainless steel Powder Coating: 80-120u Plastic: HDPE and Roto moulded Mechanism: Stainless steel



[WWW.FORPARKAUST.COM.AU](http://WWW.FORPARKAUST.COM.AU)

## STANDARDS

Complies with relevant Australian Standards including: AS 4685:2014 (P1-6) | AS 4685.0:2017 | AS/NZS 4422:2016

\*All information is commercial in confidence and is the property of Forpark Australia. All information is correct as at February 2019. For details regarding Australian standards, warranties, insurances, QA and installation, please contact your local office



## MATERIALS

Cable Tension Adjuster (High end)	Stainless Steel. Bolts to rear of top bar with cable passing through the pole and into the adjuster.		Brake Springs (Top and bottom)	Stainless steel and rubber buffer	 
Cable Anchor (Low end)	Stainless steel. Bolts to rear of top bar with cable passing through pole and into the anchor.		Cable	Galvanised, 10mm	
Cable Trolley	Stainless Steel Brake and finger protection		Uprights	125mm x 75mm x 3mm AllGal Steel, Powder coated	
			Top Bars	100mm x 100mm x 5mm AllGal Steel, Powder coated	
			Side Panels	6mm Aluminium plate, Powder coated	

WWW.FORPARKAUSTRALIA.COM.AU



### STANDARDS

Complies with relevant Australian Standards including: AS 4685:2014 (P1-6) | AS 4685.0:2017 | AS/NZS 4422:2016

\*All information is commercial in confidence and is the property of Forpark Australia. All information is correct as at February 2019. For details regarding Australian standards, warranties, insurances, QA and installation, please contact your local office

